

POWER TILLER GASOLINE - OSTRICH OVM-GE-1350D



TECHNICAL SPECIFICATIONS

BRAND NAME	OSTRICH OVM-GE-1350D
DISPLACEMENT	418 CC
MAX.POWER HP	9 HP
STARTING SYSTEM	ELECTRIC START / MANUAL START
TILLING WIDTH (MM)	1000-1350
TILLING DEPTH (MM)	100-150
SHIFT GEAR	-1, 2 , 0 , 1
TRANSMISSION	GEAR
BLADES	4 PIECES X 4 GROUP
TIRE	4.0-8



**POWER & PERFORMANCE
BEYOND IMAGINATION**



OSTRICH VILLAGE MECHANIZE
Flat No: 303, Satya Slim Apartment,
Stambalagaruvu 2nd Lane, Guntur-522006, A.P.
Mobile: 7799271489 Email: ostrich.srikanth@gmail.com
www.ostrichvillagemechanize.com

BRUSH CUTTER - OSTRICH 43P / 52SP



TECHNICAL SPECIFICATIONS

BRAND NAME	OSTRICH -43P / 52SP
ENGINE TYPE	IE40F-5 / IE44F-5
DISPLACEMENT	43 CC / 52 CC
ENGINE POWER	1.4KW/7200 r/min (2.2HP)

- FEATURES:
- High Quality Cylinder assy
 - Super Easy Recoil Starter
 - 28 mm, 9T
 - Metal base stand
 - Unique Air filter set.

- ACCESSORIES:
- GERMAN Trimmer Head
 - Premium Harness
 - Eye Glass
 - Gloves,
 - 2T blade,
 - Tool kit.

BACK PACK-BRUSH CUTTER - OSTRICH 52P

- FEATURES:
- High Quality Cylinder Assy
 - Super Easy Recoil Starter
 - 26 mm, 9T
 - Metal base stand
 - Unique Air filter set.
 - Flexibles shaft

- ACCESSORIES:
- Weeder Attachment
 - German Trimmer Head
 - Premium Harness
 - Eye Glass
 - Gloves,
 - 2T blade,
 - Tool kit.



TECHNICAL SPECIFICATIONS

BRAND NAME	OSTRICH -52P
ENGINE TYPE	IE44F-5
DISPLACEMENT	52 CC
ENGINE POWER	1.4KW/7200 r/min (2.2HP)

BRUSH CUTTER - OSTRICH 43VM



TECHNICAL SPECIFICATIONS

BRAND NAME	OSTRICH -43VM
ENGINE TYPE	IE40F-5
DISPLACEMENT	43CC / 51.7CC
ENGINE POWER	1.4KW/7200 r/min (2.2HP)



- FEATURES:
- High Quality Cylinder assy
 - Super Easy Recoil Starter
 - Unique Air filter set
 - Unique Clutch house assy
 - Unique & Heavy Gear case assy
 - 28 mm, 9T
 - Metal base stand

EARTH AUGER MODELS

OSTRICH 43EP & 52EP
with 4" / 6" / 8" BIT



TECHNICAL SPECIFICATIONS

BRAND NAME	OSTRICH - 52 CC/ 63 CC
ENGINE TYPE	IE44F-5 / IE48F
DISPLACEMENT	52CC / 63.3CC
ENGINE POWER	1.4KW/ 2.0 KW



OSTRICH 63EP
with 10 "/ 12" BIT



CHAINSAW - OSTRICH 5800




- FEATURES:
- High Quality Cylinder Assy
 - Super Easy Recoil Starter
 - High fibre plastic body
 - Magnesium crank case
 - High Mileage
 - Heavy wide guide bar
 - Chisel chain
 - Zero Complaint

TECHNICAL SPECIFICATIONS

BRAND NAME	OSTRICH -5800
DISPLACEMENT	58 CC
ENGINE POWER	2.4KW/8500 r/min
CARBURETOR TYPE	ROTAY VALVE TYPE
STARTER	SUPER EASY START
IDLE SPEED	3000 RPM
FUEL TANK CAPACITY	550 ML
FUEL RATIO (GASOLINE:OIL)	25:1
GUIDE BAR	18 " / 22"



POWER SPRAYER SET - OVM-GE-100 # 22 (DIRECT)

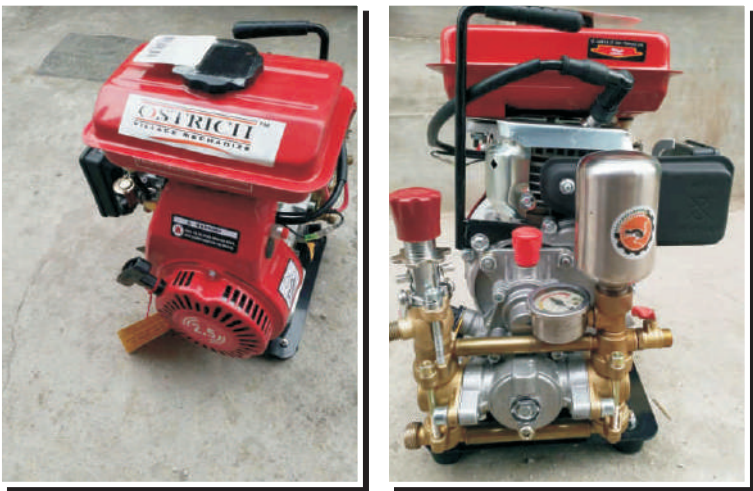


TECHNICAL SPECIFICATIONS	
BRAND NAME	OSTRICH -GE-100#22
DISPLACEMENT	98 CC (2.5 HP)
ENGINE TYPE	4 STROKE
STARTING SYSTEM	RECOIL STARTER
SUCTION PORT/ DISCHARGE PORT	22 MM
DISCHARGE CAPACITY	13.5 (m3/h)
SUCTION HEAD LIFT	10 mm
TOTAL HEAD LIFT	40m (5MPa)

POWER SPRAYER SET - OVM-GE-100 # HTP- 18

TECHNICAL SPECIFICATIONS	
BRAND NAME	OVM-GE-100 # HTP-18
DISPLACEMENT	98 CC
RATED POWER	2.5 HP
ENGINE TYPE	4 - STROKE
STARTERTING SYSTEM	RECOIL STARTER
FUEL TANK CAPACITY	1.4L
ENGINE OIL CAPACITY	0.35L




POWER SPRAYER SET - OVM-GE-163# HTP- 22

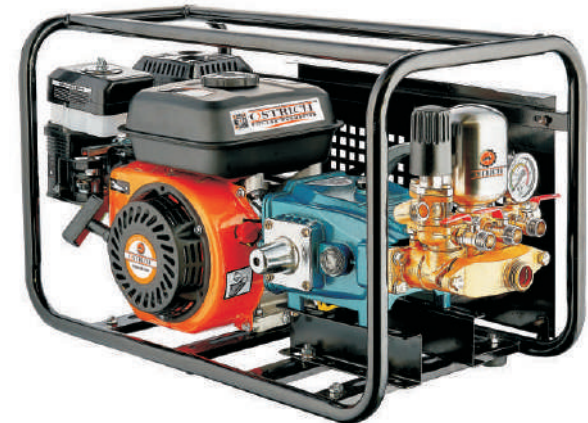

TECHNICAL SPECIFICATIONS	
BRAND NAME	OVM-GE-163 # HTP - 22
DISPLACEMENT	163 CC
RATED POWER	5.5 HP
ENGINE TYPE	4 - STROKE
STARTERTING SYSTEM	RECOIL STARTER
IDLE SPEED	3600 RPM
FUEL TANK CAPACITY	3.6L
ENGINE OIL CAPACITY	0.6L

HTP MODELS

OSTRICH OVM 22




PRESSURE	OPERATION
20 -45 (kg/cm ²)	1000-1200 (r.p.m)
SUCTION	REQUIRED POWER
14 - 26 (L/min)	1.5 – 2.0 kw

OSTRICH OVM 30




PRESSURE	OPERATION
20 - 50 (kg/cm ²)	800-1000 (r.p.m)
SUCTION	REQUIRED POWER
40- 45 (L/min)	3 – 4.0 kw

OSTRICH OVM 30A

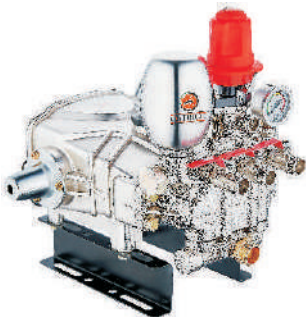

PRESSURE	OPERATION
20 - 50 (kg/cm ²)	800-1000 (r.p.m)
SUCTION	REQUIRED POWER
40- 45 (L/min)	3 – 4.0 kw

OSTRICH OVM 30C

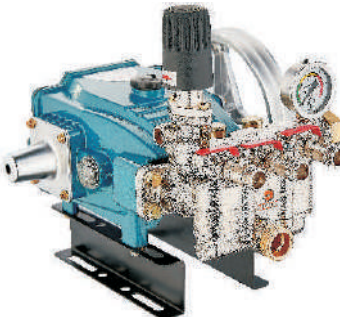

PRESSURE	OPERATION
20 - 50 (kg/cm ²)	800-1000 (r.p.m)
SUCTION	REQUIRED POWER
40- 45 (L/min)	3 – 4.0 kw

GASOLINE ENGINES - OVM-GE-163 & OVM-GE-200



TECHNICAL SPECIFICATIONS	
BRAND NAME	OVM-GE-163 / OVM-GE-200
DISPLACEMENT	163 CC / 196 CC
RATED POWER	5.5 / 6.5 HP
ENGINE TYPE	4 - STROKE
STARTERTING SYSTEM	RECOIL STARTER
IDLE SPEED	3600 RPM
FUEL TANK CAPACITY	3.6L
ENGINE OIL CAPACITY	0.6L

WATER PUMP - OSTRICH WP30X



TECHNICAL SPECIFICATIONS	
BRAND NAME	WP 30X (3 INCH)
DISPLACEMENT	196 CC
RATED POWER	6.5 HP
ENGINE TYPE	4 - STROKE
STARTERTING SYSTEM	RECOIL STARTER
IDLE SPEED	3600 RPM
FUEL TANK CAPACITY	3.6L
ENGINE OIL CAPACITY	0.6L
INLET/ OUTLET (MM)	80/80
SUCTION (M)	6
LIFT (M)	19
FLOW (M3)	35


WATER PUMP - OSTRICH W10P



TECHNICAL SPECIFICATIONS	
BRAND NAME	OSTRICH W10P (1 INCH)
DISPLACEMENT	43 CC / 52 CC
RECOIL START	SUPER EASY STARTER
INLET DIAMETER (MM)	25
OUTLET DIAMETER (MM)	25
LIFT HEIGHT (M)	16-18
SUCTION HEIGHT (M)	8-10
FLOW (M3/H)	9

WATER PUMP - OSTRICH WP20X

TECHNICAL SPECIFICATIONS	
BRAND NAME	WP 20X (2 INCH)
DISPLACEMENT	196 CC
RATED POWER	6.5 HP
ENGINE TYPE	4 - STROKE
STARTERTING SYSTEM	RECOIL STARTER
IDLE SPEED	3600 RPM
FUEL TANK CAPACITY	3.6L
ENGINE OIL CAPACITY	0.6L
INLET/ OUTLET (MM)	50/50
SUCTION (M)	6
LIFT (M)	25
FLOW (M3)	20

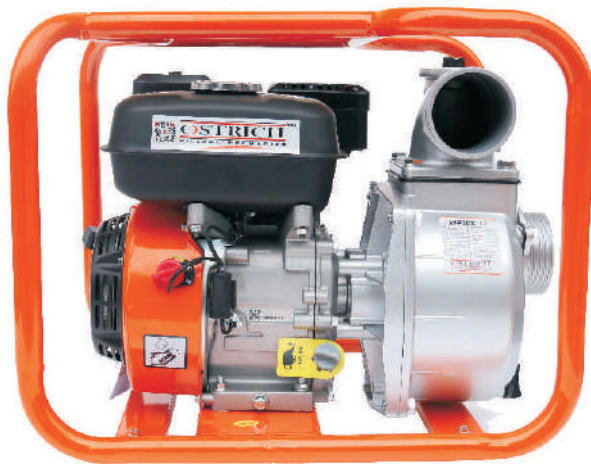

POWER TILLER GASOLINE - OSTRICH OVM-GE-750P

TECHNICAL SPECIFICATIONS	
BRAND NAME	OSTRICH OVM-GE-750P
DISPLACEMENT	208 CC
MAX.POWER HP(K.W)	7 HP
TILLING WIDTH (MM)	700-800
TILLING DEPTH (MM)	100-150
SHIFT GEAR	-1, 0 , 2 , 1
TRANSMISSION	BELT
BLADES	4 PIECES X 3 GROUP
TIRE	4.0-8



WATER PUMP – OSTRICH WP15X



TECHNICAL SPECIFICATIONS	
BRAND NAME	WP 15X (1.5 INCH)
DISPLACEMENT	98 CC
RATED POWER	2.5 HP
ENGINE TYPE	4 - STROKE
STARTERTING SYSTEM	RECOIL STARTER
FUEL TANK CAPACITY	1.4L
ENGINE OIL CAPACITY	0.35L
INLET/ OUTLET (MM)	40/40
SUCTION (M)	5
LIFT (M)	12
FLOW (M3)	10

POWER TILLER GASOLINE
OSTRICH OVM-GE-900P



TECHNICAL SPECIFICATIONS	
BRAND NAME	OSTRICH OVM-GE-900P
DISPLACEMENT	208 CC
MAX.POWER HP(K.W)	7 HP
TILLING WIDTH (MM)	700-800
TILLING DEPTH (MM)	100-150
SHIFT GEAR	-1, 2 , 0 , 1
TRANSMISSION	GEAR
BLADES	4 PIECES X 3 GROUP
TIRE	4.0-8